



▶ Highlights

- Works with a 3rd-party turbine flow meter
- Captures today's & yesterday's totals, raw totals, and instantaneous rate
- High accuracy of $\pm 0.01\%$ / 1 Hz - 10 KHz
- Up to a 10-year battery life¹
- Advanced local LCD display interface
- Self-contained, rugged design
- Installs in minutes
- IP66, -40 °C to 70 °C (-40 °F to 158 °F)
- 900 MHz / 915 MHz / 2.4 GHz / 868 MHz
- Secure AES encryption
- Class I, Division 1 (Zone 0), Intrinsically Safe



US Patent #6,967,589



OTC Transmitters

OTC Gateway

Local
Controller

RTU/EFM/PLC/
DCS/HMI/
Long-Haul Radio



Network Infrastructure



Cloud (Analytics)

▶ Self-Contained Wireless Liquid Flow Monitoring Solution

Works with a Third-Party Turbine Flow Meter

The OleumTech® OTC Wireless Flow Totalizer Transmitter is designed to work with virtually any third-party turbine flow meters for accumulating volume of liquid with high accuracy of $\pm 0.01\%$. You can set the contract hour and set the flow rate to per second, minute, hour, or day. You can also match the k factor and k factor units and display the volume output in barrels, liters, gallons, or cubic meters. The WT-FT1 provides a 2-pin pickup coil connector and a 1-inch mating union for connecting to a turbine meter. This ultra low-power transmitter is powered by a replaceable battery pack that provides up to a 10-year life.¹ The push button LCD interface allows for device configuration and instant access to process data.

Reliable, Scalable, and Safe

The field-proven wireless transmitter communicates with an assigned wireless gateway within the OTC Wireless Sensor and I/O Network creating a highly scalable network, accommodating virtually any I/O requirement.

The OleumTech wireless transmitter is certified for use in Class I, Division 1 (Zone 0) hazardous locations. It is Intrinsically Safe, designed not to cause a spark, and can be serviced without being removed from a process.

Technical Specifications

HARDWARE FEATURES

Device Functionality	· Flow Totalizer Wireless Transmitter
Embedded Controller	· Ultra-Low Power RISC Microcontroller with Internal FLASH (Field Upgradeable)
Configuration	· Standard RS232 Serial / BreeZ® Software for PC
Inputs	· High-Speed Pulse Counter Input: 1 Hz to 10 KHz · Up to 10 K Cycles per Second
Input Voltage Range	· 15 mV to 3300 mV
Accuracy and Stability	· Flow Rate Accurate to ±0.01 % of Reading · Excluding Turbine Meter and Magnetic Pickup
Power Source	· Self-Contained, Internal 3.6 Vdc Lithium Battery
Internal Battery Life	· Up to 10 Years, Based on User Defined Reporting Intervals ¹
Local LCD Display	· 32-Character Display (16x2 Lines) with 4 Function Keys + Read Button
Instant Displayable Read	· Current Flow Rate / Today's Totals / Yesterday's Totals / Battery Voltage / RF Status
Local Configuration	· Integral LCD with Push Button Interface
Device Diagnostics	· Health Tags: Battery Voltage, Received Signal Strength Indication (RSSI), RF Refresh, RF Timeout

WIRELESS COMMUNICATIONS

Radio Band	· ISM Band (License-Free)
900 MHz / 915 MHz	· FHSS, FSK, AES Encryption 256-bit (900 MHz), 128-bit (915 MHz)
2.4 GHz	· DSSS, AES Encryption 128-bit
868 MHz	· LBT-AFA, AES Encryption 128-bit
Bit Rate	· 900/915 MHz: 9600 bps / 115.2 kbps; 2.4 GHz: 250 kbps; 868 MHz: 80 kbps
Output Power (Max)	· 900/915 MHz: 10 mW; 2.4 GHz: 63 mW; 868 MHz: 25mW
Receiving Sensitivity	· 900/915 MHz: -110 dBm @ 9600 bps, -100 dBm @ 115.2 kbps · 2.4 GHz: -101 dBm @ 250 kbps; 868 MHz: -106 dBm @ 80 kbps
RF Range	· 900/915 MHz: Up to 7500 Feet / 1.4 Miles (2.3 km) with Clear Line of Sight ² · 2.4 GHz: Up to 4.3 Miles (7 km) with Clear Line of Sight ² · 868 MHz: Up to 5.2 Miles (8.4 km) with Clear Line of Sight ²

CERTIFICATIONS & COMPLIANCE

EMC/EMI	· FCC Part 15 (USA), IC ICES-003 (Canada), ACMA (Australia) · AS/NZS CISPR 32 (Australia), EN55032 & EN55024 (EU)
Safety	· Class I, Division 1, Groups A, B, C, D T3C; Ex ia IIC T3 · Class I, Zone 0; AEx ia IIC T3 · ATEX: Sira 13ATEX2142X; Ex ia IIC T3 Ga; II 1 G · IECEx: SIR 13.0054X; Ex ia IIC T3 Ga

MECHANICAL SPECIFICATIONS

Dimensions	· 5.5" (W) x 16" (H) x 4.4" (D) / 140 mm (W) x 406 mm (H) x 112 mm (D)
Package Dimensions	· 10.25" (W) x 14" (H) x 6.5" (D) / 260mm (W) x 356mm (H) x 165mm (D)
Package Weight	· ~7 lbs / 3.2 kg
Connection Fitting	· 1" NPT Female, 1" Mating Union to Flow Turbine Included
Enclosure Casing Material	· Type 4X Aluminum; IP66
Mating Assembly	· Stainless Steel 316
Magnetic Pickup Coil Connection	· 2-Pin Circular Connector (Part # MS3106A-10SL-4S)

GENERAL SPECIFICATIONS

Operating Conditions	· Ambient Temperature (Class I, Division 1 / Zone 0): -40 °C to 70 °C (-40 °F to 158 °F) · LCD Screen -20 °C to 70 °C (-4 °F to 158 °F) · Ambient Temperature (Non-Hazardous Applications): -40 °C to 80 °C (-40 °F to 176 °F) · LCD Screen -20 °C to 70 °C (-4 °F to 158 °F) · Humidity: 0 to 99 %, Non-Condensing
Warranty	· 2-Year Parts and Labor
Country of Origin	· USA

ORDERING INFORMATION


Model Numbers	· WT-0900-FT1, WT-0915-FT1, WT-2400-FT1, WT-0868-FT1
Wirelessly Connects To	· OTC Wireless Gateway
Configuration Cable	· SX1000-CC2, 20-ft All-in-One Configuration Cable
Replacement Battery	· Use OleumTech SX1000-BP3 Only

¹Ambient temperature and one transmission per 1 min interval without any retries were used to calculate battery life. Actual battery life may vary depending on environmental factors, application, and usage. Use data shown above only as general point of reference. See OleumTech Battery Life Expectancy Chart for predicted battery life based on reporting interval.

²The maximum RF range data was collected under optimal test conditions, including a clear line of sight between antennas. Actual wireless RF range may vary depending on location, RF interference, weather, antenna type, cable type, and line of sight.

©2019 OleumTech Corporation. All rights reserved. OleumTech and BreeZ are registered trademarks of OleumTech Corporation in the United States. All other trademarks and trade names are the property of their respective holders. Specifications, design, and product descriptions subject to change without notice. This device contains proprietary intellectual property protected by US Patent #6967589. Document ID: 67-4039-001_Q

Networking Diagram

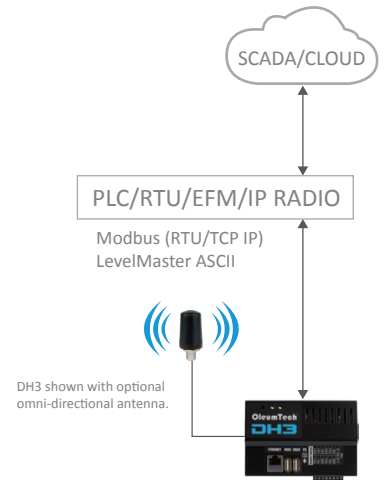

OTC GATEWAY

OTC TRANSMITTERS

Point-to-Multipoint
"Star Topology"

